

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 899 943 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

03.03.1999 Bulletin 1999/09

(51) Int. Cl.<sup>6</sup>: H04N 1/405, H04N 1/52

(21) Application number: 98116138.3

(22) Date of filing: 26.08.1998

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(71) Applicant:

FUJI PHOTO FILM CO., LTD.  
Kanagawa-ken (JP)

(72) Inventor: Shimizu, Osamu

Fujinomiya-shi, Shizuoka-ken (JP)

(30) Priority: 27.08.1997 JP 231275/97

30.09.1997 JP 266795/97

07.01.1998 JP 1761/98

(74) Representative:


Klunker . Schmitt-Nilson . Hirsch  
Winzererstrasse 106  
80797 München (DE)

### (54) Image formation method

(57) A method for forming an image comprises the steps of dividing an inputted image into a plurality of unit areas, preparing at least five gradation conversion tables relating a density value of the density data to a dot generation energy value corresponding to a size of a dot to be printed, preparing a matrix dividing each of the unit areas into predetermined number of element areas, dividing each of the unit areas into predetermined number of the element areas by means of the matrix, assigning one of the plurality of gradation conversion tables to each of the element area in each of the unit area, and recording the dots converted from the

density data, wherein the plurality of conversion tables are prepared in such a manner that there exists at least three converted energy values other than the minimum and the maximum values thereof at an arbitrary density value in halftone density, and wherein the plurality of conversion tables are prepared in such a manner that the number of element areas in which the minimum value of the converted energy is assigned is more than half of the number of all the element areas at the minimum density level having the maximum value of the converted energy.

FIG. 11

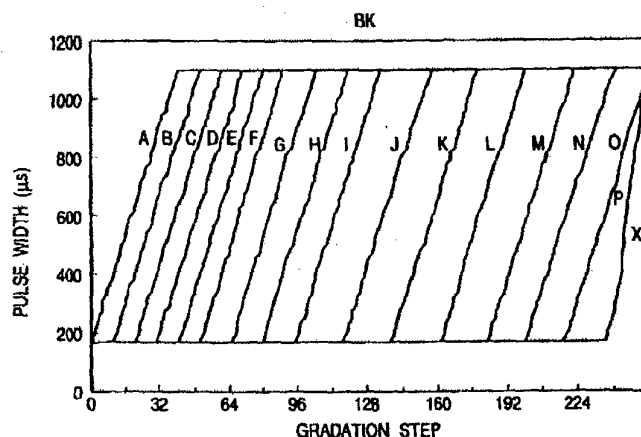

EP 0 899 943 A2

## Description

BACKGROUND OF THE INVENTIONTechnical Field of the Invention

[0001] The present invention relates to an image formation method and in particular to an image formation method effective for providing a record image of high quality.

Description of Related Art

[0002] In recent years, full-color laser beam printers and thermal transfer printers have been rapidly finding spreading use as output terminals of personal computers, workstations, etc. In this case, required performance is a capability of outputting text data, line drawing data, and image data, namely, continuous-tone output is required.

[0003] As this kind of system, for example, a system disclosed in Unexamined Japanese Patent No. Hei 9-1866 is well known.

[0004] The system divides an image into a plurality of blocks, changes the input/output characteristics corresponding to the positions of pixels therein for each block, converts image data density level into density level to recorded dots, and changes and disperses the positions where dots of the same size are recorded for each block, thereby preventing appearance of structural pattern in the image such as moiré.

[0005] Basically, the conventional system is a kind of a pseudo area gradation technique using a multilevel dither method having only less discrete density level. However, the configuration as described above is adopted, namely, size, placement regularity of recorded dots is weakened as much as possible, thereby preventing appearance of structural pattern in the image such as moiré.

[0006] In more detail, image data is converted from R(red), G(green), and B(blue) of brightness data into density data of three primary colors of C(cyan), M(magenta), and Y(yellow) for printing, then an under color is removed for preparing a black plate based on the density data, and C, M, Y, and BK (black) data is prepared. Further, correction processing such as masking is applied, then gradation processing is executed in such a manner that the pixels at the positions in the block described above are divided into odd and even lines and different gradation conversion table characteristics are applied to each of the lines.

[0007] However, in the system, the gradation conversion table characteristics are monotonous, thus occurrence of roughness is inevitable when low-density recorded pixels are formed on a white background.

[0008] The system assumes that a printed matter has stable characteristics. In fact, it is necessary to consider printing on a printed matter which is hard to say that its

characteristics are always stable. That is, with photo-sensitive material for thermal developing or photo-thermal-sensitive recording material, even if energy at the minimum level required for recording is given, threshold as to whether or not color is developed varies due to variation in sensitivity caused by humidity, etc., and the print result becomes delicately different.

SUMMARY OF THE INVENTION

[0009] It is therefore an object of the present invention to provide an image formation method which can also be used for printing on a printed matter which is hard to say that its characteristics are always stable and is effective for providing a high-quality recording image.

[0010] In order to achieve the above object, there is provided a method for forming an image comprising the steps of: dividing an inputted image into a plurality of unit areas; preparing at least five gradation conversion tables relating a density value of the density data to a dot generation energy value corresponding to a size of a dot to be printed; preparing a matrix dividing each of the unit areas into predetermined number of element areas; dividing each of the unit areas into predetermined number of the element areas by means of the matrix; assigning one of the plurality of gradation conversion tables to each of the element area in each of the unit area; and recording the dots converted from the density data, wherein the plurality of conversion tables are prepared in such a manner that there exists at least three converted energy values other than the minimum and the maximum values thereof at an arbitrary density value in halftone density, and wherein the plurality of conversion tables are prepared in such a manner that the number of element areas in which the minimum value of the converted energy is assigned is more than half of the number of all the element areas at the minimum density level having the maximum value of the converted energy.

[0011] In the method, the inputted image data may include a plurality of color plate image data, and all the above steps may be executed with respect to each of the color plate image data. The plurality of color plate image data may be image data of cyan, magenta, yellow and black plates.

[0012] Here, there may be prepared at least three kinds of matrixes in which the numbers of the element areas arranged in one of the horizontal direction and the vertical direction thereof are different from each others.

[0013] With respect to one of the color plate image data, the assignment of the plurality of conversion tables to the each of the element areas are executed exclusively and as random. The one color plate image data is a color plate image data having the least density, specifically, the yellow color plate data.

[0014] In the method, with respect to the color plate image data other than the one color plate image data, the assignment of the plurality of conversion tables to

the each of the element areas are executed based on a predetermined rule. The predetermined rule is different from each others in the color plate image data.

[0015] Accordingly, even if recorded pixels at low density are formed on a white background, occurrence of roughness can be decreased remarkably. Therefore, the image formation method can also be used for printing on a printed matter which is hard to say that characteristics thereof are always stable, and can provide a high-quality recording image.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0016] In the accompanying drawings:

FIG. 1 is a block diagram to show a schematic configuration of a color image formation system for realizing an image formation method according to the present invention;

FIG. 2 is an illustration to show conversion characteristic of BK for a gradation conversion table;

FIG. 3 is an illustration to show conversion characteristic of C for the gradation conversion table;

FIG. 4 is an illustration to show conversion characteristic M for the gradation conversion table;

FIG. 5 is an illustration to show a conversion matrix for BK;

FIG. 6 is an illustration to show a conversion matrix for C;

FIG. 7 is an illustration to show a conversion matrix for M and Y;

FIG. 8 is an enlarged view of BK highlight recorded dots;

FIG. 9 is an enlarged view of BK halftone recorded dots;

FIG. 10 is an enlarged view of BK shadow recorded dots;

FIG. 11 is an illustration to show another conversion characteristic of BK for a gradation conversion table;

FIG. 12 is an illustration to show another conversion characteristic of C for the gradation conversion table;

FIG. 13 is an illustration to show another conversion characteristic of M for the gradation conversion table;

FIG. 14 is an illustration to show another conversion characteristic of Y for the gradation conversion table;

FIG. 15 is an illustration to show one example of a gradation conversion table for gradation conversion with respect to the conversion characteristic of BK;

FIG. 16 is an illustration to show one example of a gradation conversion table for pulse width assignment with respect to the conversion characteristic of BK;

FIG. 17 is an illustration to show one example of a gradation conversion table for gradation conversion

with respect to the conversion characteristic of C;

FIG. 18 is an illustration to show one example of a gradation conversion table for pulse width assignment with respect to the conversion characteristic of C;

FIG. 19 is an illustration to show one example of a gradation conversion table for gradation conversion with respect to the conversion characteristic of M;

FIG. 20 is an illustration to show one example of a gradation conversion table for pulse width assignment with respect to the conversion characteristic of M;

FIG. 21 is an illustration to show one example of a gradation conversion table for gradation conversion with respect to the conversion characteristic of Y;

FIG. 22 is an illustration to show one example of a gradation conversion table for pulse width assignment with respect to the conversion characteristic of Y; and

FIG. 23 is an illustration to show repetitive reproducibility of printing;

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0017] Referring now to the accompanying drawings, there are shown preferred embodiments of the present invention.

[0018] FIG. 1 is a block diagram to show a schematic configuration of a color image formation system for realizing an image formation method according to one embodiment of the present invention.

[0019] In FIG. 1, numeral 10 is a digital data output unit at the preceding stage, numeral 20 is an image processor, and numeral 30 is a thermal transfer printer. The data on which image processing is performed in the image processor 20 is a total of 24 bits of eight R bits, eight G bits, and eight B bits.

[0020] The image processor 20 has a density conversion section 21, a conversion table 22, a black plate preparation and under color removal (UCR) section 23, a color correction section 24, a data selector 25, and a gradation processing section 26.

[0021] When the thermal transfer printer 30 is started, digital image data is output from the digital data output unit 10 to the image processor 20.

[0022] The image data inputted to the image processor 20 (RGB brightness data) is converted into density data of C, M, and Y of three primary colors for printing by the density conversion section 21 using the conversion table 22.

[0023] Next, the CMY density data is sent to the black plate preparation and UCR section 23, which then performs under color removal for preparing a black (BK) plate. Resultantly, the black plate preparation and UCR section 23 outputs C, M, Y, and BK density data.

[0024] Then, the CMY density data is inputted to the color correction section 24 and undergoes processing

such as masking. In FIG. 1, the CMY density data undergoing the processing is shown as C, M, Y.

[0025] Next, the data selector 25 selects only one color data from among the C, M, Y, and BK density data and inputs the selected data to the gradation processing section 26.

[0026] The gradation processing section 26 performs processing of introducing a screen angle to prevent moire into the input data and processing of converting the input data into a special density value using a gradation conversion table described later.

[0027] The processing of introducing a screen angle to prevent moire is similar to processing performed hitherto and will not be discussed again. The conversion processing using a gradation conversion table will be discussed.

[0028] FIG. 2 to FIG. 4 show examples of gradation conversion characteristics. FIG. 2 shows the BK color gradation conversion characteristic, FIG. 3 shows the C color gradation conversion characteristic, and FIG. 4 shows the M and Y color gradation conversion characteristics.

[0029] In FIG. 2 to FIG. 4, the horizontal axis denotes input image tone density and the vertical axis denotes the record pulse width (time) corresponding to the recorded dot size. Here, the input image tone density has 256 gradation steps (0-255).

[0030] For the gradation conversion characteristics shown in FIG. 2 to FIG. 4, characteristic curves to show the relationship between input image tone density and energy to generate recorded dots are set to at least five lines or more (16 lines of A to P in FIG. 2, 10 lines of A to J in FIG. 3, and eight lines of A to H in FIG. 4).

[0031] The bottom of the lines indicates a threshold value of the recorded dot generation. From the level, the characteristic lines grow up in proportion to the increase of the tone density.

[0032] In the gradation conversion characteristics shown in FIG. 2 to FIG. 4, there are set at least three or more characteristic curves each having an energy value other than the maximum or minimum energy for an arbitrary density value in a halftone area. At the maximum tone density (step 255), characteristic curve energy is set a little high as compared with other tone areas (190  $\mu$ s in FIG. 2, 220  $\mu$ s in FIG. 3, 300  $\mu$ s in FIG. 4), whereby "solid" flatness is improved.

[0033] In the minimum density value where energy of a print dot reaching substantially the maximum exists, the number of print dots with energy being substantially the minimum is set to a half or more of the total number of print dots.

[0034] FIG. 5 to FIG. 7 show matrixes (unit blocks) to indicate which conversion curve among energy conversion characteristics is selected. FIG. 5 shows a BK matrix, FIG. 6 shows a C matrix, and FIG. 7 shows an M matrix.

[0035] Each matrix is formed of a unit block. Each of the unit blocks of the matrixes consists of a different

number of dots because of the same length and width and different subscanning resolution, and gradation conversion is executed in accordance with the gradation conversion characteristic defined by the relative position relationship in the block. Then, a different pulse width is assigned to each tone density and energy applied to each print dot in the unit block is determined.

[0036] In each matrix, element value "X" is a print dot to which energy is little applied with respect to any tone density and "1" "2" "3," ... are print dots corresponding to characteristic curves "A," "B," "C," ... in FIG. 2 to FIG. 4. In each color matrix, the resolution in the main scanning direction is 600 dpi and the resolution in the subscanning direction is 1200 dpi (dots per inch) (BK), 900 dpi (C), or 600 dpi (M). The matrix size in terms of the number of elements is 8 dots long by 4 dots wide (BK), 6 dots long by 4 dots wide (C), or 4 dots long by 4 dots wide (M). Since the BK matrix has a resolution of 1200 dpi in the subscanning direction, for example, if 150 blocks/inch are used as unit blocks, each unit block contains 32 print dots of 8 dots long by 4 dots wide and therefore there is a possibility that 32 types of gradation conversion characteristics at the maximum will become necessary. However, print dots converted in accordance with the same gradation conversion characteristic exist, thus 17 types of gradation conversion characteristics are assigned to 32 print dots. This assignment is executed to the matrixes BK, C, and M uniquely and to the Y matrix as random numbers.

[0037] The Y matrix has the same size (4 dots long by 4 dots wide) and resolution (600 dpi in the main scanning direction and 600 dpi in the subscanning direction) as the M matrix; print dot characteristic curves are determined with the matrixes such that the positions of matrix elements other than "X" are made different as random from one matrix to another.

[0038] If the sizes and resolutions of the color matrixes are set as described above, the matrixes on the image have the same size (length in the actual space rather than the number of elements) independently of colors.

[0039] Since a very large number of tone density-print energy conversion curves (gradation conversion characteristic curves) are set and three or more print dots having an intermediate energy value other than the maximum or minimum energy are set at the halftone area, continuous gradation can be realized easily and stably.

[0040] The matrix conditions are as follows:

#### BK matrix

#### [0041]

1. Subscanning resolution conversion: 600 to 1200 dpi

Conversion of original data resolution 600 dpi to 1200 dpi by applying adjacent interpolation (sub-

scanning direction adjacent pixel resolution value 128 gradation steps or more) and linear interpolation (subscanning direction adjacent pixel resolution value less than 128 gradation steps)

2. Block configuration:

8 lines in subscanning direction  
4 lines in main scanning direction

3. Number of print dots in block: 32

4. Gradation conversion characteristic types: A to P

5. Gradation conversion characteristic assignment to print dot:

Unique

6. Gradation conversion: 256 to 64 gradation steps

Conversion of original gradation steps 256 to 64 according to conversion table

7. Pulse width assignment:

Assignment of 64 gradation steps to pulse widths according to conversion table.

5

10

15

20

verted.

2. Block configuration:

4 lines in subscanning direction  
4 lines in main scanning direction

3. Number of print dots in block: 16

4. Gradation conversion characteristic types: A to H

5. Gradation conversion characteristic assignment to print dot:

Unique

6. Gradation conversion: 256 to 128 gradation steps

Conversion of original gradation steps 256 to 128 according to conversion table

7. Pulse width assignment:

Assignment of 128 gradation steps to pulse widths according to conversion table.

Y matrix

C matrix

[0044]

[0042]

1. Subscanning resolution conversion: 600 to 900 dpi

Conversion of original data resolution 600 dpi to 900 dpi by applying adjacent interpolation (subscanning direction adjacent pixel resolution value 128 gradation steps or more) and linear interpolation (subscanning direction adjacent pixel resolution value less than 128 gradation steps)

2. Block configuration:

6 lines in subscanning direction  
4 lines in main scanning direction

3. Number of print dots in block: 24

4. Gradation conversion characteristic types: A to L

5. Gradation conversion characteristic assignment to print dot:

Unique

6. Gradation conversion: 256 to 128 gradation steps

Conversion of original gradation steps 256 to 128 according to conversion table

7. Pulse width assignment:

Assignment of 128 gradation steps to pulse widths according to conversion table.

25

30

35

40

45

1. Subscanning resolution conversion: No conversion

Original data resolution 600 dpi is not converted.

2. Block configuration:

4 lines in subscanning direction  
4 lines in main scanning direction

3. Number of print dots in block: 16

4. Gradation conversion characteristic types: A to H

5. Gradation conversion characteristic assignment to print dot:

Gradation conversion characteristics are assigned to print dots 1-8 exclusively and as random.

6. Gradation conversion: 256 to 128 gradation steps

Conversion of original gradation steps 256 to 128 according to conversion table

7. Pulse width assignment:

Assignment of 128 gradation steps to pulse widths according to conversion table.

[0045] Processing of the gradation processing section 26 will be discussed with reference to FIG. 8 to FIG. 10.

[0046] FIG. 8 is an enlarged view of BK highlight (step 64) recorded dots, FIG. 9 is an enlarged view of BK half-tone (step 128) recorded dots, and FIG. 10 is an enlarged view of BK shadow (step 192) recorded dots; (a) shows recorded dots according to the embodiment and (b) shows conventional recorded dots.

[0047] Comparing the recorded dot arrangements in (a) and (b) of each figure, in FIG. 8, gradation is reproduced by large size and small numbers of recorded

M matrix

[0043]

1. Subscanning resolution conversion: No conversion

Original data resolution 600 dpi is not converted.

55

dots, so that loss of recorded dots easily occurring in highlight is inconspicuous. Thus, if recorded pixels at low density are formed on a white background, occurrence of roughness is avoided and reproducibility is improved.

[0048] Other examples of conversion processing using gradation conversion table will be discussed.

[0049] FIG. 11 to FIG. 14 show other examples of gradation conversion characteristics. FIG. 11 shows the BK gradation conversion characteristic, FIG. 12 shows the C gradation conversion characteristic, FIG. 13 shows the M gradation conversion characteristic, and FIG. 14 shows the Y gradation conversion characteristic. In FIG. 11 to FIG. 14, the horizontal axis denotes input image tone density and the vertical axis denotes the record pulse width (time) corresponding to the recorded dot size. The input image tone density has 256 gradation steps (0-255).

[0050] For the gradation conversion characteristics shown in FIG. 11 to FIG. 14 like those shown in FIG. 2 to FIG. 4, there are set at least five lines or more characteristic curves indicating the relationship between input image tone density values and energy to generate recorded dots (17 lines of A to P and X in FIG. 11, 12 lines of A to L and X in FIG. 12, and nine lines of A to H and X in FIG. 13 and FIG. 14). Here, conversion characteristic curve X is assigned to element "X" of each matrix shown in FIG. 5 to FIG. 7 and is set so that predetermined energy is applied only to the maximum tone density (step 255).

[0051] The BK, C, M, and Y gradation conversion characteristics shown in FIG. 11 to FIG. 14 differ from those shown in FIG. 2 to FIG. 4 in that line pitches of the gradation conversion characteristic curves vary. That is, the line pitches are widened gradually from the highlight area to the shadow area.

[0052] The gradation conversion characteristics shown in FIG. 11 to FIG. 13 are assigned to the matrixes shown in FIG. 5 to FIG. 7 respectively. The Y gradation conversion characteristic shown in FIG. 14 is assigned to the M (Y) matrix shown in FIG. 7. At this time, the gradation conversion characteristic X is assigned to the matrix element "X" uniquely and the gradation conversion characteristics A to H are assigned to the positions of matrix elements other than "X" as random.

[0053] Conversion tables 1 (for gradation conversion) and 2 (for pulse width assignment) in the color matrixes to obtain the gradation conversion characteristics shown in FIG. 11 to FIG. 14 are shown in FIG. 15 to FIG. 22.

[0054] Printing with recorded dots according to the present embodiment (example) and printing with conventional recorded dots (control example) will be discussed with reference to FIG. 23, which shows reproducibility when repetitive printing is executed from highlight to shadow. The vertical axis indicates standard deviation and the horizontal axis indicates average den-

sity. As shown in FIG. 23, printing based on the present embodiment has small standard deviation, meaning that the repetitive reproducibility is high.

[0055] In the embodiment, BK recorded dots have been mainly described, but similar description is also applied to C, M, and Y. To superpose colors on each other to reproduce multiple colors, the subscanning periods of the colors are made different and the recorded dot positions are made different for each color, whereby continuity of gradation is improved and if superposition of the colors shifts, a sense of incongruity for visual sensation can be reduced.

[0056] An image formation system described in Japanese Patent Publication No. 2608808 is similar to the embodiment of the present invention. There is shown an example wherein four characteristic curves of gradation conversion table and two types of "energy values other than the maximum or minimum energy at the halftone area" exist. In this case, however, if printing is executed on a recording material having a thin ink layer, continuity of gradation cannot be stably realized. That is, it has been shown that if a condition of setting tone jump at gradation to visible level or less at one temperature and humidity is found out, when the temperature or humidity changes, the tone jump exceeds the visible level and therefore a sufficient effect cannot be obtained.

[0057] Then, to print on a recording material having a thin ink layer, it has been confirmed that at least five characteristic curves of gradation conversion table are set and at least three types of energy values other than the maximum or minimum energy at the halftone area are set, whereby a sufficient effect on a recording material having a thin ink layer can be obtained.

[0058] The image formation method described above is more advantageous if it is applied to a recording material having a thin ink layer. The following recording material disclosed in Unexamined Japanese Patent Publication No. Hei 7-117359 can be named as such a recording material:

[0059] Thermal transfer recording material having a substantially transparent thermal ink layer containing 30-70 parts by weight of a pigment and 25-60 parts by weight of an amorphous organic macromolecular polymer having a softening point at 40°C-150°C, the thermal ink layer having a film thickness ranging from 0.2  $\mu\text{m}$  to 1.0  $\mu\text{m}$  wherein the diameter of each of particles of 70% or more of the pigment in the thermal ink layer is 1.0  $\mu\text{m}$  or less and the optical reflection density of a transfer image is at least 1.0 or more on a white support.

[0060] As has been described heretofore, according to the present invention, the characteristic curves of a gradation conversion table indicating the relationship between tone density values and energy to generate recorded dots are set to at least five lines and there are set at least three types of energy values other than the maximum or minimum energy in a arbitrary tone density at the halftone area, whereby smoothly continuous gradation is provided. Further, in the minimum gradation

value where a print dot with energy reaching substantially the maximum exists, the number of print dots with energy being substantially the minimum is set to a half or more of the total number of print dots, whereby even if recorded pixels at low density are formed on a white background, occurrence of roughness can be decreased remarkably.

[0061] Therefore, the image formation method can also be used for printing on a printed matter which is hard to say that characteristics thereof are always stable, and can provide a high-quality recording image.

#### Claims

1. A method for forming an image comprising the steps of:

dividing an inputted image into a plurality of unit areas;

preparing at least five gradation conversion tables relating a density value of the density data to a dot generation energy value corresponding to a size of a dot to be printed;

preparing a matrix dividing each of the unit areas into predetermined number of element areas;

dividing each of the unit areas into predetermined number of the element areas by means of the matrix;

assigning one of the plurality of gradation conversion tables to each of the element area in each of the unit area; and

recording the dots converted from the density data, wherein the plurality of conversion tables are prepared in such a manner that there exists at least three converted energy values other than the minimum and the maximum values thereof at an arbitrary density value in halftone density, and wherein the plurality of conversion tables are prepared in such a manner that the number of element areas in which the minimum value of the converted energy is assigned is more than half of the number of all the element areas at the minimum density level having the maximum value of the converted energy.

2. A method for forming an image as set forth in claim 1, wherein the inputted image data includes a plurality of color plate image data, and there is executed from the step of dividing the inputted image to the step of recording the dots with respect to each of the color plate image data.

3. The image formation method as set forth in claim 2, wherein there are prepared at least three kinds of matrixes in which the numbers of the element areas

arranged in one of the horizontal direction and the vertical direction thereof are different from each others.

4. The image formation method as set forth in claim 2, wherein the assignment of the plurality of conversion tables to the each of the element areas are executed exclusively and as random with respect to one of the plurality of color plate image data.

5. The image formation method as set forth in claim 2, wherein the assignment of the plurality of conversion tables to the each of the element areas are executed based on a predetermined rule with respect to the color plate image data other than the one color plate image data.

6. The image formation method as set forth in claim 5, wherein the predetermined rule is different from each others in the color plate image data.

7. The image formation method as set forth in claim 4, wherein the one color plate image data is a color plate image data having the least density.

8. The image formation method as set forth in claim 7, wherein the plurality of color plate image data are image data of cyan, magenta, yellow and black plates, and one color plate image data is the image data of the yellow color plate.



FIG. 1

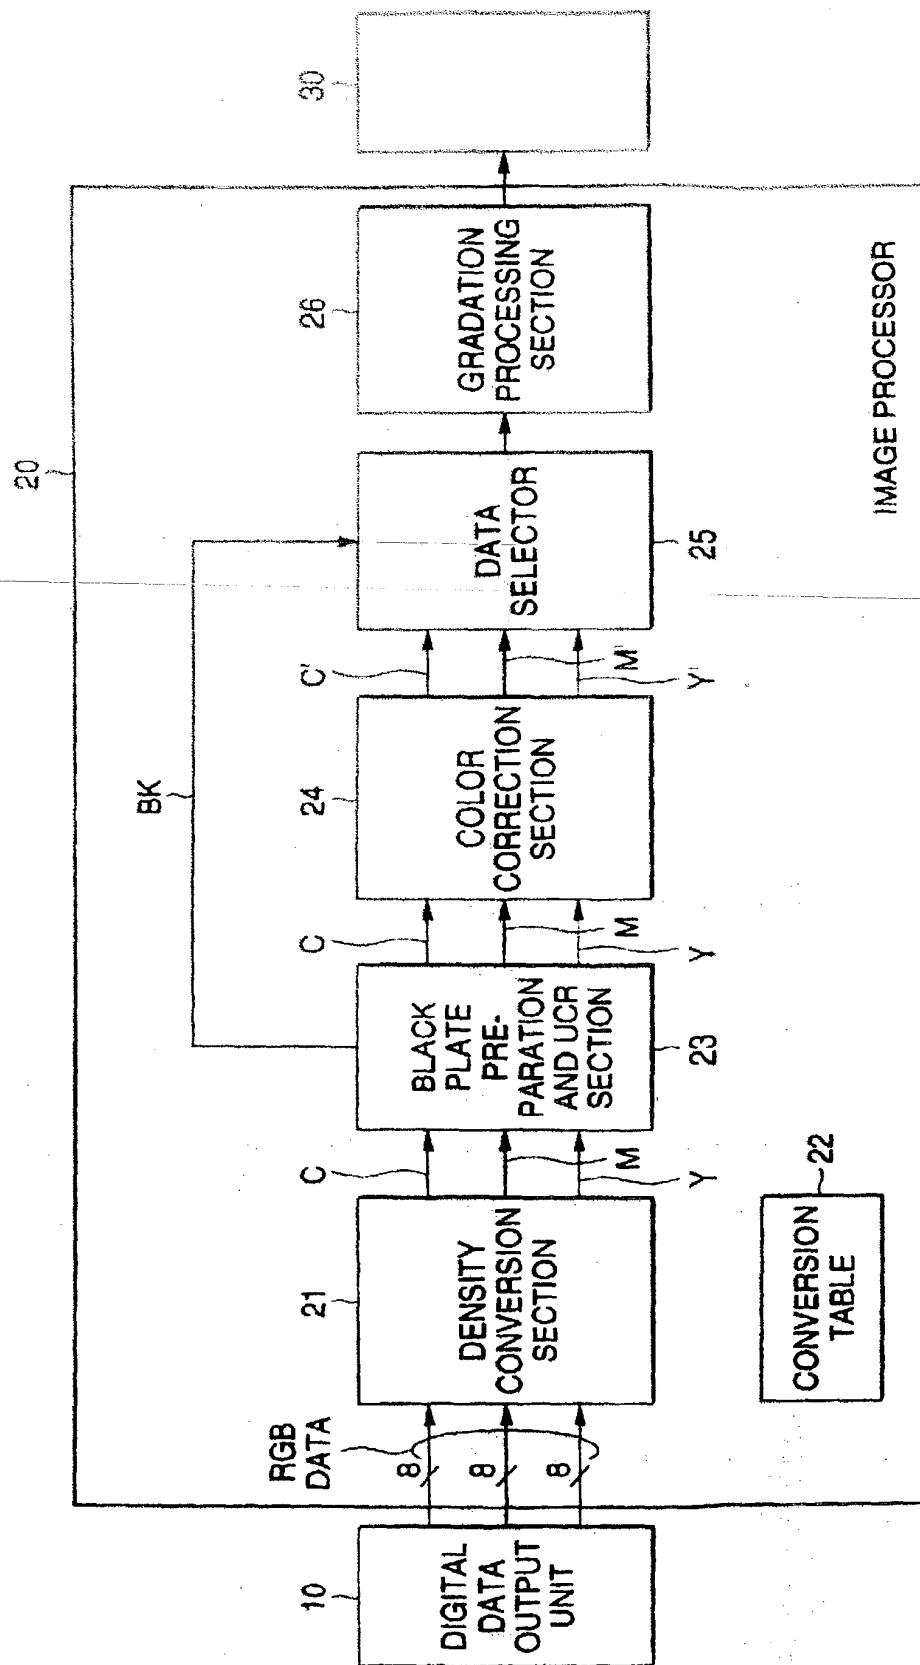


FIG. 2

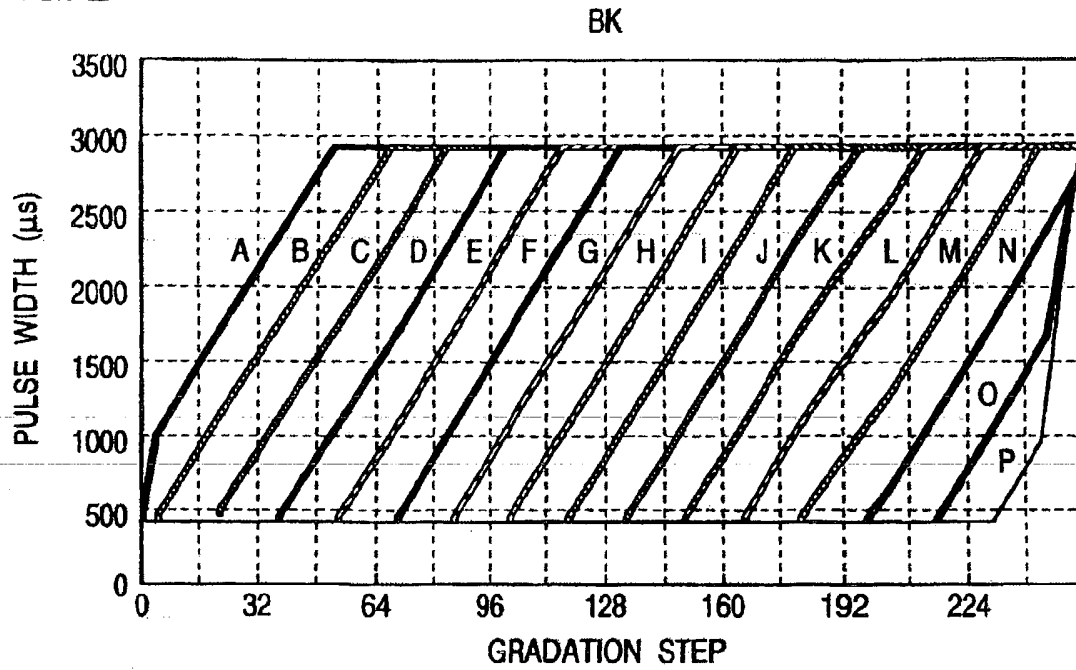


FIG. 3

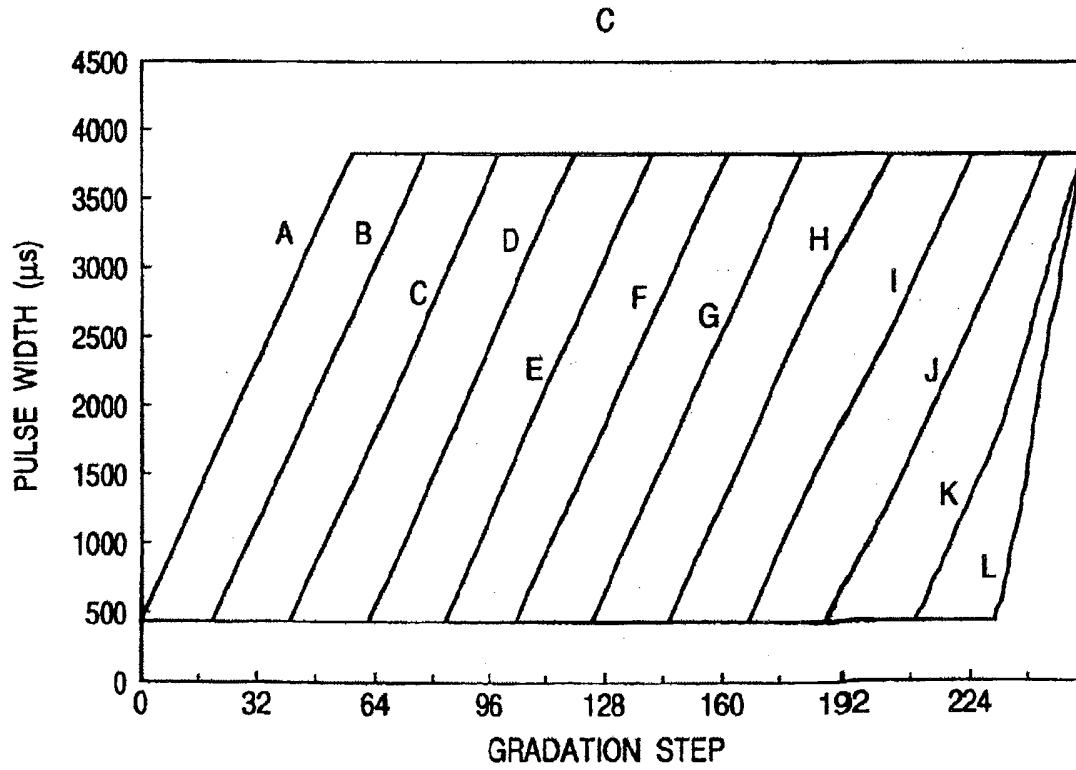


FIG. 4

M AND Y

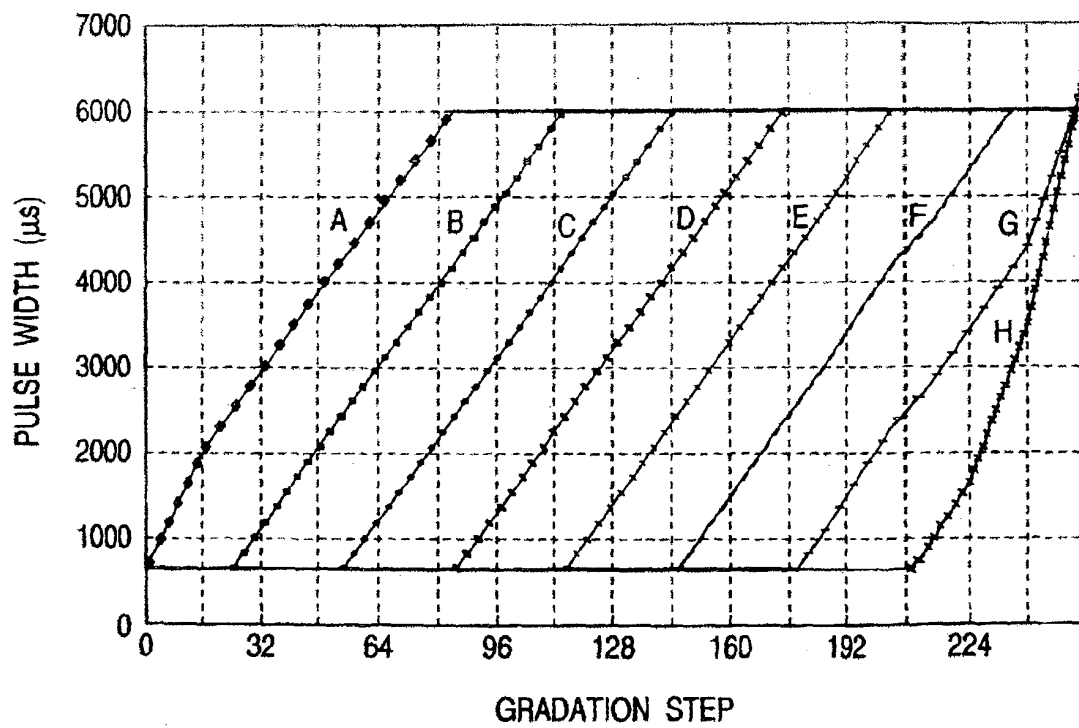


FIG. 5

MAIN SCANNING  
DIRECTION 600dpi

BK

SUBSCANNING  
DIRECTION 1200dpi

1	X	16	X
X	12	X	8
13	X	4	X
X	5	X	9
3	X	14	X
X	10	X	16
15	X	2	X
X	7	X	11

FIG. 6

MAIN SCANNING  
DIRECTION 600dpi

C

SUBSCANNING  
DIRECTION 900dpi

1	X	4	X
X	7	X	10
5	X	2	X
X	11	X	8
3	X	6	X
X	9	X	12

FIG. 7

MAIN SCANNING  
DIRECTION 600dpi

M (&Y)

SUBSCANNING  
DIRECTION 600dpi

1	X	5	X
X	3	X	7
6	X	2	X
X	8	X	4

FIG. 8 (a)

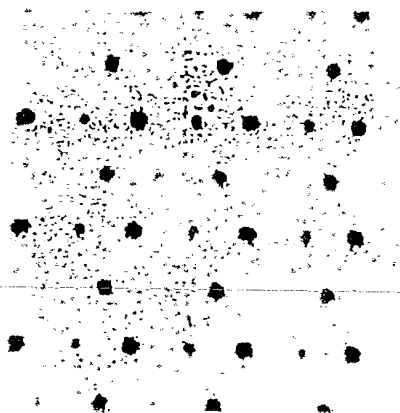


FIG. 8 (b)

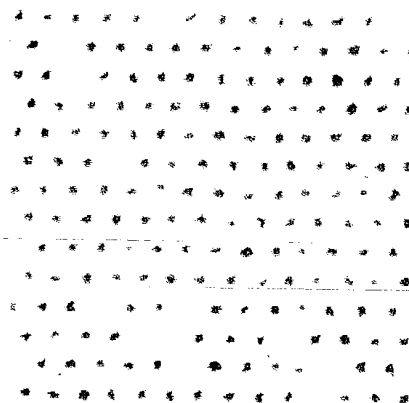


FIG. 9 (a)

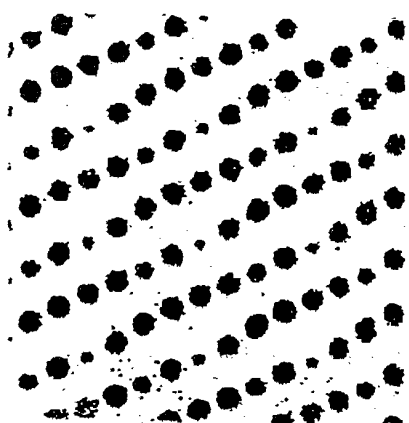
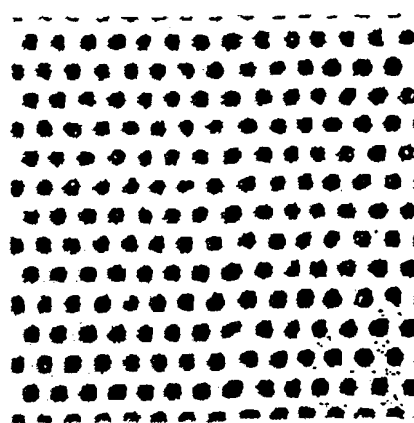
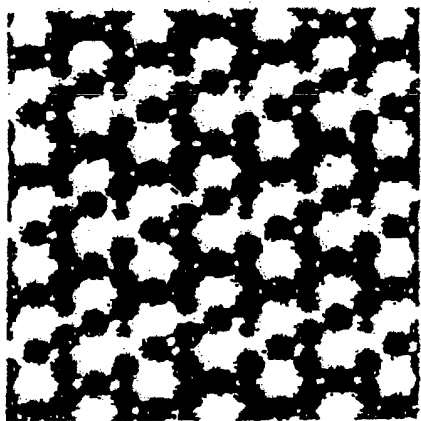


FIG. 9 (b)



*FIG. 10 (a)*



*FIG. 10 (b)*

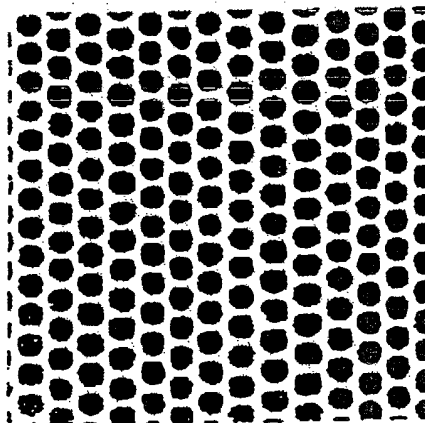


FIG. 11

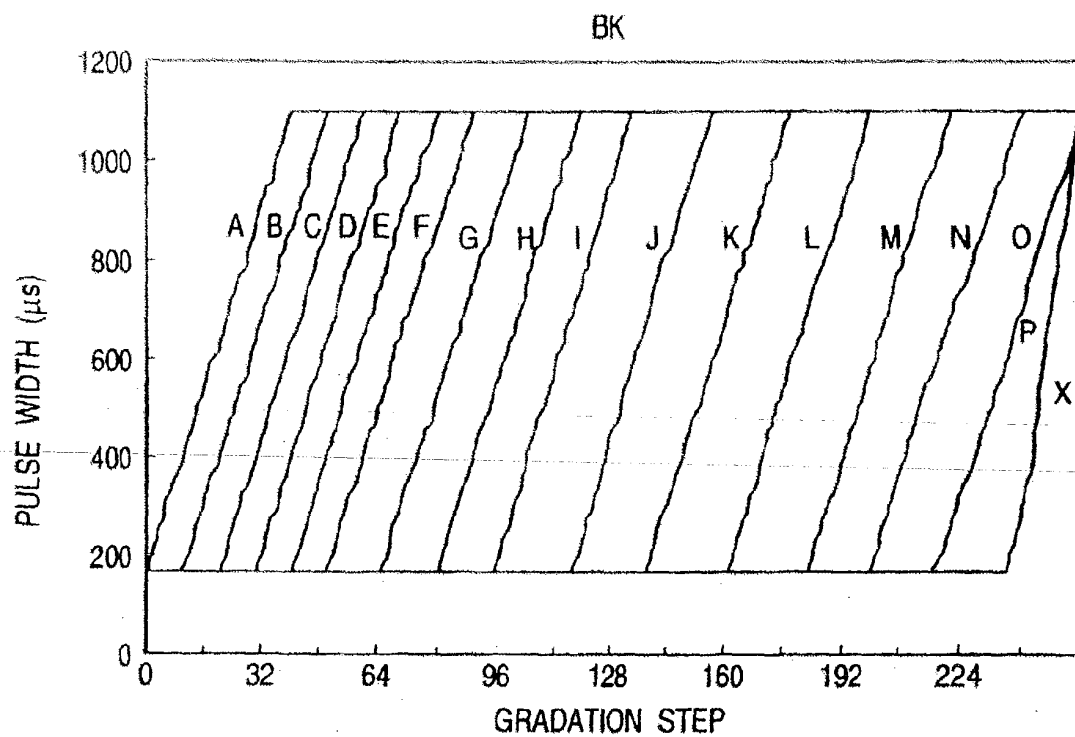


FIG. 12

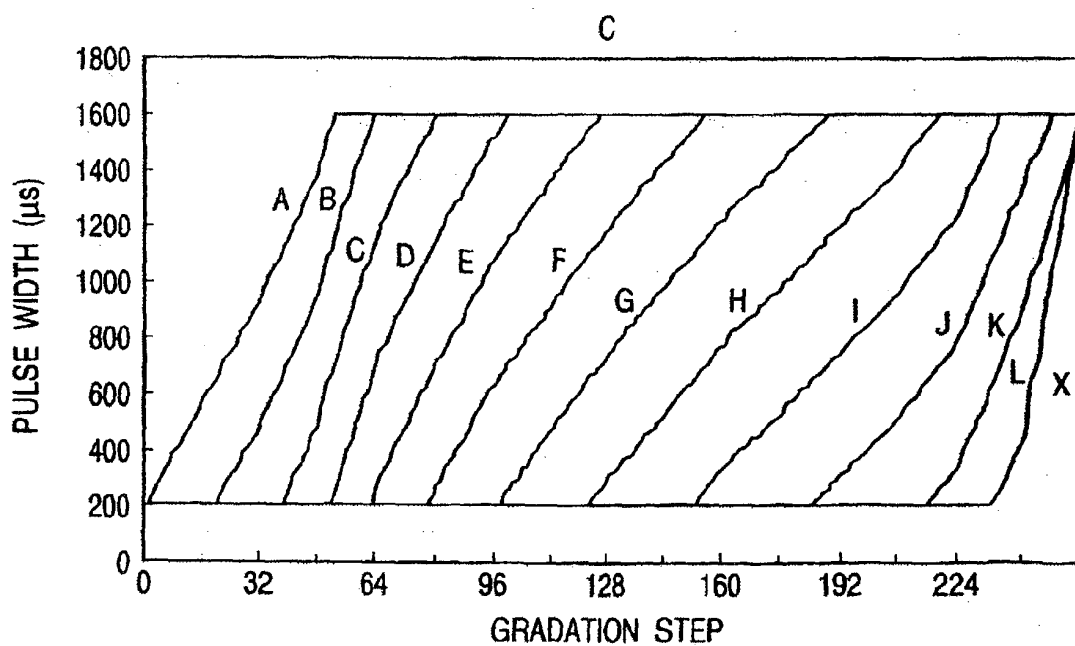


FIG. 13

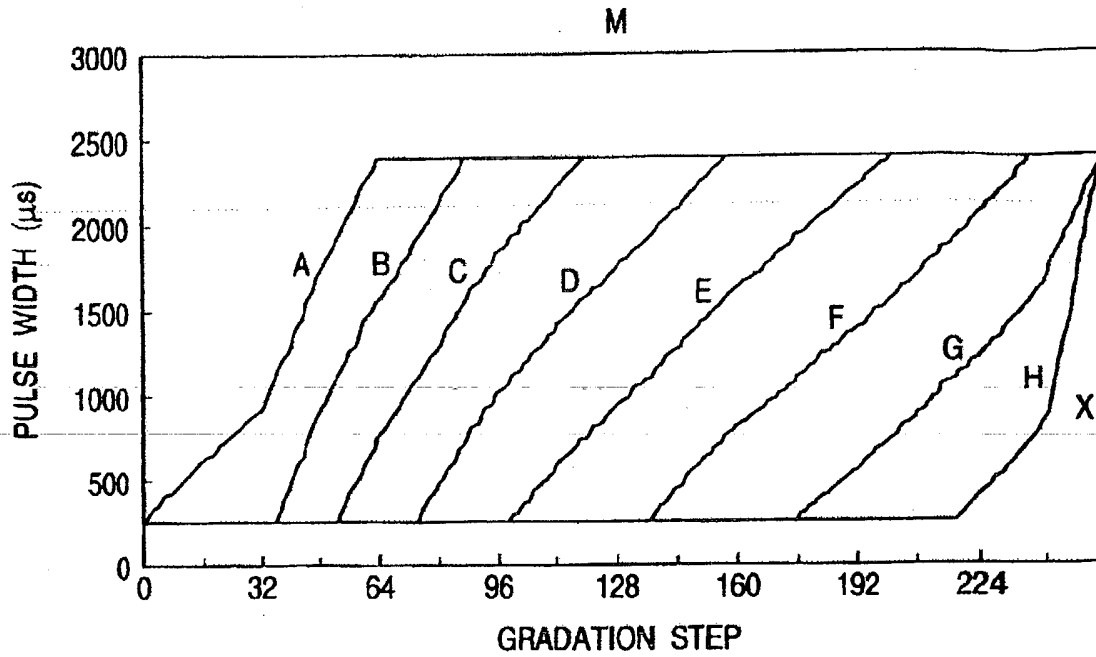


FIG. 14

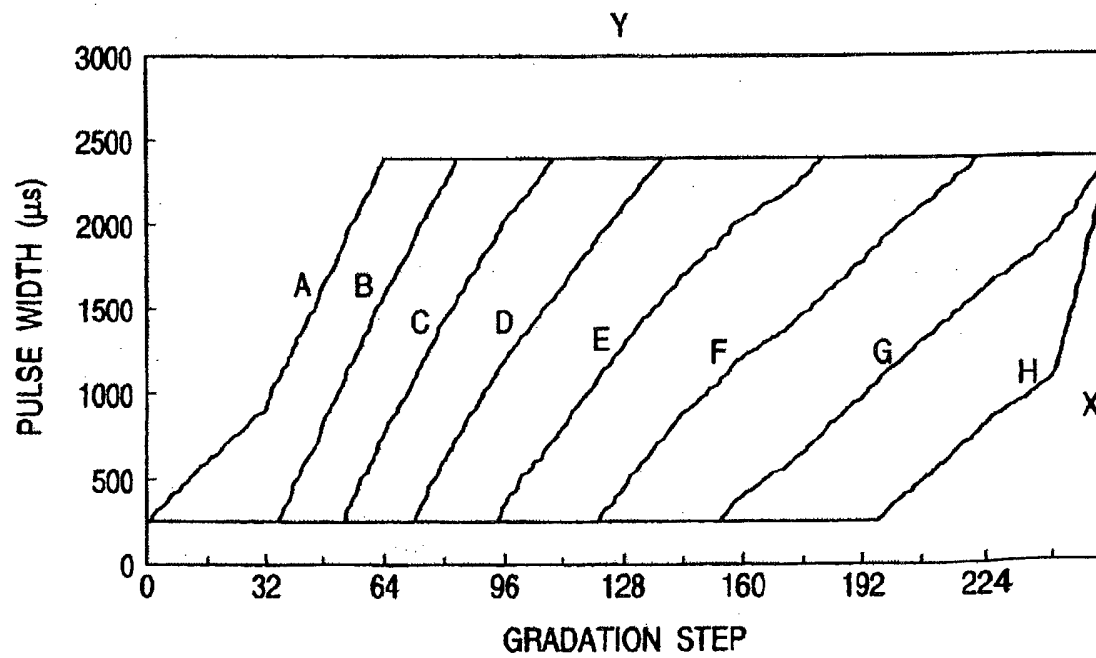




FIG. 15

GRADATION CONVERSION TABLE 1 (FOR BK MATRIX)

	X	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	0	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	0	4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
				1	1	1	1										
63	0	63							1	1	1	1	1	1	1	1	1
64	0	63	63	63	51	36	21	1	1	1	1	1	1	1	1	1	1
65	0	63	63	63	53	38	23	1	1	1						1	1
														1	1		
127	0	63	63				63	63	63	48	15	1	1	1	1	1	1
128	0	63	63	63	63	63	63	63	63	51	18	1	1	1	1	1	1
129	0	63	63	63	63	63	63	63	63								
191									63	63	63	63	45	12	1	1	1
192	0	63	63	63	63	63	63	63	63	63	63	63	47	14	1	1	1
193	0	63	63	63	63	63	63	63									
													63	63	63		
253								63	63	63	63	63	63	63	63	59	56
254	0	63	63	63	63	63	63	63	63	63	63	63	63	63	63	61	60
255	48	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63	63

FIG. 16

GRADATION CONVERSION TABLE 2 (FOR BK MATRIX)

GRADATION STEP AFTER CONVERSION	PULSE WIDTH [ $\mu$ s]
0	0
1	170
2	185
15	380
16	395
17	410
31	620
32	635
33	650
61	1070
62	1085
63	1100

FIG. 17

GRADATION CONVERSION TABLE 1 (FOR C MATRIX)

	X	A	B	C	D	E	F	G	H	I	J	K	L
0	0	1	1	1	1	1	1	1	1	1	1	1	1
1	0	2	1	1	1	1	1	1	1	1	1	1	1
2	0	4	1	1	1	1	1	1	1	1	1	1	1
				1	1	1	1						
63	0	63						1	1	1	1	1	1
64	0	127	124	84	44	4	1	1	1	1	1	1	1
65	0	127	127	87	47	7	1	1	1	1	1		
												1	1
127	0	127	127				87	47	7	1	1	1	1
128	0	127	127	127	127	127	88	48	8	1	1	1	1
129	0	127	127	127	127	127	89	49	9				
191									89	49	9	1	1
192	0	127	127	127	127	127	127	127	90	50	10	1	1
193	0	127	127	127	127	127	127	127					
													106
253								127	127	127	127	118	113
254	0	127	127	127	127	127	127	127	127	127	127	123	120
255	96	127	127	127	127	127	127	127	127	127	127	127	127

*FIG. 18*

GRADATION CONVERSION TABLE 2 (FOR C MATRIX)

GRADATION STEP AFTER CONVERSION	PULSE WIDTH [ $\mu$ s ]
0	0
1	214
2	225
15	
16	379
17	390
31	
32	555
33	566
63	896
64	907
65	918
125	1578
126	1589
127	1600

FIG. 19

GRADATION CONVERSION TABLE 1 (FOR M MATRIX)

	X	A	B	C	D	E	F	G	H
0	0	1	1	1	1	1	1	1	1
1	0	2	1	1	1	1	1	1	1
2	0	4	1	1	1	1	1	1	1
							1		
63	0	122	74	26	1				1
64	0	125	77	29	1	1	1	1	1
65	0			31	1	1	1	1	1
127	0	127	127	127	87	39	1	1	1
128	0	127	127	127	89	41	1	1	1
129					90	42	1	1	1
191	0	127	127	127	127	113	65	17	1
192	0	127	127	127	127	114	66	18	1
193						115	67	19	
253	0	127	127	127	127	127	127	121	115
254	0	127	127	127	127	127	127	124	121
255	96	127	127	127	127	127	127	127	127

FIG. 20

GRADATION CONVERSION TABLE 2 (FOR M MATRIX)

GRADATION STEP AFTER CONVERSION	PULSE WIDTH [ $\mu$ s ]
0	0
1	258
2	275
15	
16	513
17	530
31	
32	785
33	802
63	1312
64	1329
65	1346
125	2366
126	2383
127	2400

FIG. 21

GRADATION CONVERSION TABLE 1 (FOR Y MATRIX)

	X	A	B	C	D	E	F	G	H
0	0	1	1	1	1	1	1	1	1
1	0	2	1	1	1	1	1	1	1
2	0	4	1	1	1	1	1	1	1
							1		
63	0	123	75	27	1				1
64	0	126	78	30	1	1	1	1	1
65	0			32	1	1	1	1	1
127	0	127	127	127	108	60	12	1	1
128	0	127	127	127	110	62	14	1	1
129	0				111	63	15	1	1
191	0	127	127	127	127	127	90	42	1
192	0	127	127	127	127	127	92	44	1
193						127	93	45	
253	0	127	127	127	127	127	127	123	117
254	0	127	127	127	127	127	127	125	122
255	96	127	127	127	127	127	127	127	127


FIG. 22

GRADATION CONVERSION TABLE 2 (FOR Y MATRIX)

GRADATION STEP AFTER CONVERSION	PULSE WIDTH [ $\mu$ s]
0	0
1	258
2	275
15	
16	513
17	530
31	
32	785
33	802
63	1312
64	1329
65	1346
125	2366
126	2383
127	2400



FIG. 23

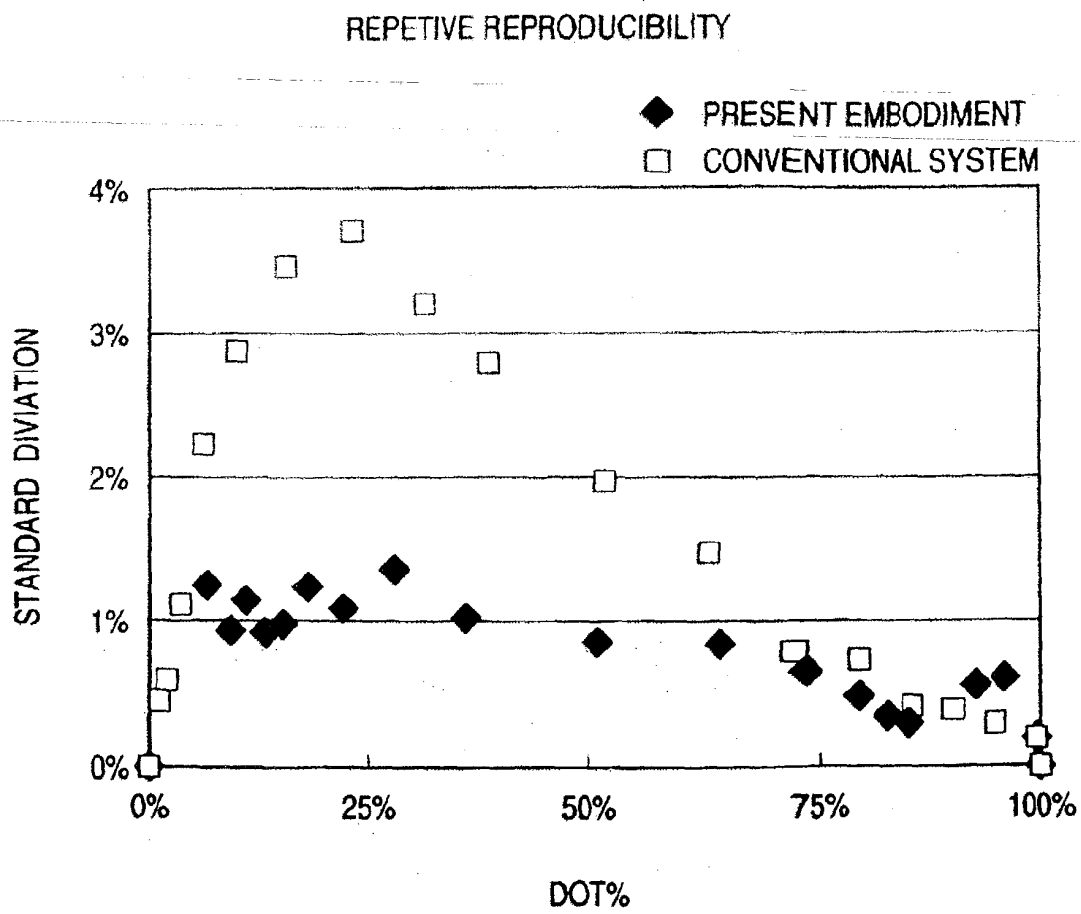



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 899 943 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
17.03.1999 Bulletin 1999/11

(51) Int. Cl.<sup>6</sup>: H04N 1/405, H04N 1/52

(43) Date of publication A2:  
03.03.1999 Bulletin 1999/09

(21) Application number: 98116138.3

(22) Date of filing: 26.08.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant:  
FUJI PHOTO FILM CO., LTD.  
Kanagawa-ken (JP)

(72) Inventor: Shimizu, Osamu  
Fujinomiya-shi, Shizuoka-ken (JP)


(30) Priority: 27.08.1997 JP 231275/97  
30.09.1997 JP 266795/97  
07.01.1998 JP 1761/98

(74) Representative:  
Klunker . Schmitt-Nilson . Hirsch  
Winzererstrasse 106  
80797 München (DE)

### (54) Image formation method

(57) A method for forming an image comprises the steps of dividing an inputted image into a plurality of unit areas, preparing at least five gradation conversion tables relating a density value of the density data to a dot generation energy value corresponding to a size of a dot to be printed, preparing a matrix dividing each of the unit areas into predetermined number of element areas, dividing each of the unit areas into predetermined number of the element areas by means of the matrix, assigning one of the plurality of gradation conversion tables to each of the element area in each of the unit area, and recording the dots converted from the density data, wherein the plurality of conversion tables are prepared in such a manner that there exists at least three converted energy values other than the minimum and the maximum values thereof at an arbitrary density value in halftone density, and wherein the plurality of conversion tables are prepared in such a manner that the number of element areas in which the minimum value of the converted energy is assigned is more than half of the number of all the element areas at the minimum density level having the maximum value of the converted energy.

FIG. 11

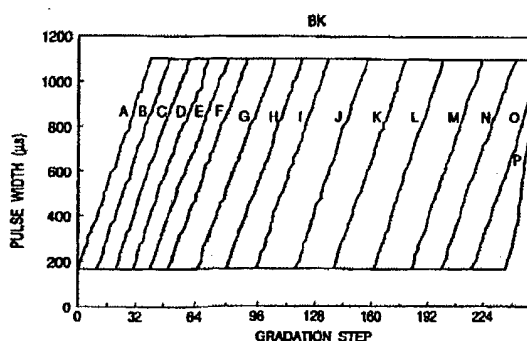

EP 0 899 943 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 98 11 6138

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 680 195 A (AGFA-GEVAERT N.V.) 2 November 1995	1,2	H04N1/405 H04N1/52
Y	* the whole document *	3-6	
Y	EP 0 761 434 A (AGFA-GEVAERT N.V.) 12 March 1997 * column 3, line 23 - line 25 *	3	
Y	US 5 394 252 A (T. M. HOLLADAY ET AL.) 28 February 1995 * abstract *	4-6	
A	EP 0 720 350 A (FUJI PHOTO FILM CO.) 3 July 1996		
A	WO 95 02938 A (AGFA-GEVAERT N.V.) 26 January 1995		
A	US 5 287 209 A (SEIICHIRO HIRATSUKA ET AL.) 15 February 1994		TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	US 5 073 966 A (HIROAKI SATO) 17 December 1991		H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 January 1999	Examiner De Roeck, A
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date C : document cited in the application L : document cited for other reasons S : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 01/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 6138

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-01-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 680195 A	02-11-1995	JP 7299933 A	14-11-1995
		US 5799137 A	25-08-1998
EP 761434 A	12-03-1997	JP 9123583 A	13-05-1997
US 5394252 A	28-02-1995	CA 2140410 A	03-09-1995
		EP 0670655 A	06-09-1995
		JP 7274015 A	20-10-1995
EP 720350 A	03-07-1996	JP 7312677 A	28-11-1995
WO 9502938 A	26-01-1995	BE 1007264 A	02-05-1995
		AT 171330 T	15-10-1998
		DE 69406929 D	02-01-1998
		DE 69406929 T	18-06-1998
		DE 69413330 D	22-10-1998
		EP 0634862 A	18-01-1995
		EP 0709012 A	01-05-1996
		JP 7057104 A	03-03-1995
		JP 8512444 T	24-12-1996
		US 5654808 A	05-08-1997
		US 5828815 A	27-10-1998
US 5287209 A	15-02-1994	JP 2760160 B	28-05-1998
		JP 4269075 A	25-09-1992
		JP 2800071 B	21-09-1998
		JP 5169720 A	09-07-1993
		JP 2538121 B	25-09-1996
		JP 4150166 A	22-05-1992
		DE 4133474 A	21-05-1992
		GB 2250397 A,B	03-06-1992
US 5073966 A	17-12-1991	JP 59205874 A	21-11-1984
		DE 3417118 A	15-11-1984
		US 5461681 A	24-10-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82